

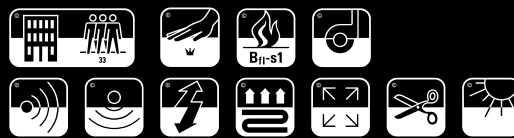


Technical details carpet tiles

| | | | | | | |
|------------------------|-----------------------------|--------------------------|--------------------------|-------------|---------------------|------------------------------------|
| Manufacturing type | Herstellungsart | Mode fabrication | Productie methode | | | tufted 1/10" |
| Construction | Struktur | Structure | Structuur | | | structured loop pile |
| Pile composition | Polmateriaal | Couche d'usure | Poolsamenstelling | | | 100% PA 6 - Econyl® |
| Dye method | Farbgestaltung | Coloration | Kleurverwerking | | | solution dyed |
| Primary backing | Trägermaterial | Premier dossier | Tuftdoek | | | polyester fleece |
| Secondary backing | Rückenausrüstung | Dossier | Rug | | | GREENBASE modified bitumen |
| Pile weight | Poleinsatzgewicht | Poids de velour | Poolgewicht | ISO 2424 | g/m ² | 650 (+/-) |
| Total weight | Gesamtgewicht | Poids total | Totaal gewicht | ISO 8543 | g/m ² | 4.400 (+/-) |
| Pile height | Polhöhe | Hauteur du velours | Poolhoogte | ISO 1766 | mm | 4,0 (+/-) |
| Total height | Gesamtdicke | Épaisseur totale | Totale dikte | ISO 1765 | mm | 7,0 (+/-) |
| Tuft density | Noppenzahl | Nombre de touffes | Aantal punten | ISO 1763 | /m ² | 192.000 (+/-) |
| Size | Abmessung | Dimension | Afmeting | | cm | 50 x 50 |
| Packing | Verpackung | Emballage | Verpakking | | | 20 per box 5 m ² |
| Classification | Klassifikation | Classement | Gebruiksklasse | EN 1307 | | 33 heavy commercial |
| Comfort rating | Komfortklasse | Classement confort | Comfort klasse | EN 1307 | | LC 1 |
| Castor chair | Stuhlrolleneignung | Chaise à roulettes | Rolstoelgeschikt | EN 985 | | A intensive |
| Dimensional stability | Dimensionstabilität | Stabilité dimensionnelle | Dimensionele stabiliteit | EN 986 | | ≤ 0,2% |
| Fire resistance | Brennverhalten | Comportement feu | Brandgedrag | EN 13501-1 | | Bfl-S1 loose laid |
| Permanent antistatic | Permanent Antistatisch | Antistatique permanent | Permanent antistatisch | ISO 6356 | kV | ≤ 2,0 |
| Transversal resistance | Durchgangswiderstand | Résistance transversale | Doorgangsweerstand | ISO 10965 | Ω | ≥ 10¹⁰ |
| Thermal resistance | Wärmedurchlaßwiderstand | Résistance thermique | Warmte-doorlaatweerstand | ISO 8302 | m ² /K/W | 0,072 |
| Sound absorption | Schallabsorptionsgrad | Absorption phonique | Geluidsabsorptie | ISO 354 | α _w | 0,15 |
| Impact sound reduction | Trittschallverbesserungsmaß | Isolation phonique | Geluidsisolatie | ISO 10140 | ΔL _w | 26 dB |
| | | | | | ISO 10140 | ΔL |
| Light fastness | Lichtechtheit | Solidité à la lumière | Lichtechtheid | ISO 105 B02 | | ≥ 7 |
| Rubbing fastness | Reibechtheit | Solidité au frottement | Wrijftechtheid | ISO 105 X12 | | ≥ wet/dry |

Broadloom carpet

Scan the QR code for the technical details of broadloom carpet.



EN 1307
for use as floorcovering
in buildings (EN 14041)
according to the
manufacturer's specification

CE
22
EN 14041
DOP 000572T-003



ECONYL®
ENDLESS POSSIBILITIES

TWISE

